


PRODUCT INFORMATION

1191 Wheeling Road, Wheeling, IL 60090
 Phone: 847-541-9000 Fax: 847-541-7549

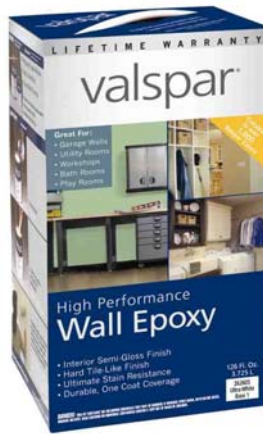

262605 Valspar Interior Wall Epoxy

PRODUCT: 262605

DESCRIPTION:

Valspar® Interior Wall Epoxy Kit

This is a 2-Component System – Mix “Part-A” with “Part-B” per instructions before using!

FEATURES:

Valspar Interior Wall Epoxy is specially designed for interior applications requiring maximum durability and adhesion. When fully cured, the semi-gloss finish is highly scrubbable, scuff resistant and moisture resistant.

WHERE TO USE:

Properly prepared interior surfaces including drywall, concrete, wood, brick and metal. Use it for walls in the garage, kitchen, bathroom, laundry room, utility room or wherever maximum durability is a must.

SURFACE PREPARATION:

Previously Painted: Clean the surface thoroughly using a solution of TSP and water. Follow by rinsing with clean water. The surface must be free of dirt, grease and stains. Glossy surfaces should be dulled by sanding or by using a liquid deglosser. Scrape off any loose paint and smooth edges by sanding.

Drywall: Smooth tape joints and wipe all powdery dust from the surface. Prime bare areas with Valspar® Drywall Primer.

Concrete/Masonry: Concrete surfaces should be cured for a minimum of 60 days. Remove any powdery dust or efflorescence from mortar joints.

Metal: Remove any rust or oil from the surface. Prime metal with a rust-inhibitive metal primer.

Wood: Sand new wood surfaces smooth and prime with Valspar® Multi-Purpose Primer.

MIXING INSTRUCTIONS:

Mix all individual components thoroughly. Pour hardener “Part-B” into base “Part-A” and stir for at least 3 minutes until both parts are blended uniformly. After a thorough stirring, cover and wait 30 minutes for proper induction before using the product. Stir the product again before using. This product has a pot life of 36 hours at a temperature of 77°F; shorter in higher temperatures. The product may appear usable after 36 hours, but should be thrown out, as the durability and chemical resistance properties will be greatly diminished.

TYPICAL PRODUCT PROPERTIES:

VEHICLE TYPE: Acrylic-Epoxy
 SOLIDS: 47% WT. 35% VOL.
 VOC: 50 g/L MAX
 WT/GAL: 10.4 lbs.
 VISCOSITY: 95–105 KU
 FLASHPOINT: N/A
 60° GLOSS: 85–95 Units

COVERAGE/THINNING:

One gallon covers 350–450 sq. ft per gallon on smooth surfaces, 250–350 sq. ft on rough surfaces. Thinning is not recommended unless needed for spray application.

FILM THICKNESS: 4 mils wet
 1.4 mils dry

DRYING TIME:

Dries to the touch in 1 hour. Recoat in 4-6 hours. Allow fresh paint to cure 7 days before washing.

APPLICATION:

Mix Parts A & B and wait 30 minutes for induction. To ensure consistent, uniform color, intermix multiple containers of the same color. Only intermix an amount that can be used within the application timeframe. Apply only when surface and air temperatures are 50–90°F (10–32°C). Use a premium quality synthetic brush, 3/8" premium roller cover or airless spray. If spray application is used, the product will dry tack free in about an hour and may be recoated in 4–6 hours.

CLEAN-UP:

Clean up applicators and equipment with warm, soapy water. Keep a wet cloth handy to clean up spills and splatters.

PACKAGING:

1 Gallon Kit–Each

Each Kit contains the following items to make 1 gallon of coating:

- Part A Base
- Part B Hardener
- Stir Stick
- Instructions

STORAGE AND DISPOSAL:

Do not freeze! Keep container closed when not in use. Do not transfer contents to other containers for storage or disposal. In case of spillage, absorb with inert material. Dispose of contaminated absorbent, container and/or unused contents in accordance with local, state and federal regulations.

Product Information Hotline:

1-888-313-5569

CAUTIONS:

THE VARIOUS COMPONENTS OF THIS KIT CONTAIN THE FOLLOWING CHEMICALS THAT MAY BE HARMFUL IF MISUSED: EPOXY RESIN, AND ORGANIC SOLVENT. READ CAUTIONS ON THE INDIVIDUAL CONTAINERS CAREFULLY.

FIRST AID:

EYE CONTACT: Flush thoroughly with water for at least 15 minutes. If irritation persists, **get medical attention immediately.**

SKIN CONTACT: Wash thoroughly with soap and water. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean contaminated shoes. If irritation persists, **get medical attention.**

IF INHALED: If you experience difficulty in breathing, leave the area to obtain fresh air. If breathing difficulty continues, **get medical attention immediately.**

IF SWALLOWED: Do not induce vomiting. **Get medical attention immediately.**

Delayed effect from long term exposure:

Reports of commercial painters have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the vapors may be harmful or fatal.

DO NOT TAKE INTERNALLY.

KEEP OUT OF REACH OF CHILDREN.

For additional safety and chronic health hazard information, refer to the Material Safety Data Sheet for this product.

EMERGENCY MEDICAL TELEPHONE:

1-888-345-5732

When components are mixed together, this epoxy kit contains less than 50 g/L VOC (0.5 lb./Gal VOS)

WARNING! If you scrape, sand or remove old paint, you may release lead dust. **LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE.** Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

The data on this sheet represent typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. Valspar assumes no obligation or liability for use of this information. UNLESS VALSPAR AGREES OTHERWISE IN WRITING, VALSPAR MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR FREEDOM FROM PATENT INFRINGEMENT. VALSPAR WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option.